Product data sheet

Specifications





Regulated Power Supply, 100 to 240V AC, 24V, 2.1A, single phase, Optimized

ABLS1A24021

Product availability: Stock - Normally stocked in distribution

Price*: 110.00 USD

Main

Range of Product	Modicon Power Supply
Product or Component Type	Power supply
Power supply type	Regulated switch mode
Variant option	Optimized
Enclosure Material	Plastic
Nominal input voltage	100240 V AC single phase 100240 V AC phase to phase
Kw Rating	50 W
Output voltage	24 V DC
Power supply output current	2.1 A

Complementary

Efficiency at full load	85264 V AC
Nominal network frequency	5060 Hz
Network system compatibility	TN
	TT IT
Maximum leakage current	1 mA 240 V AC
Input protection type	Integrated fuse (not interchangeable) 3.15 A
	External protection (recommended) 20 A Curve C
	External protection (recommended) 10 A Curve B
	External protection (recommended) 6 A Curve C
Inrush current	35.0 A 115 V
	75.0 A 230 V
Power factor	0.45 at 115 V AC
	0.35 at 230 V AC
Efficiency	86 % 115 V AC
	88 % 230 V AC
Output voltage adjustment	2428 V
Power dissipation in W	7.5 W
Current consumption	< 1.1 A 115 V AC
	< 0.65 A 230 V AC
Turn-on time	<3s
Holding time	> 20 ms 100 V AC
	> 100 ms 230 V AC

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Startup with capacitive loads	3000 µF	
Residual ripple	< 75 mV	
Meantime between failure [MTBF]	2000000 h at 77.0000000000 °F (25 °C), full load conforming to SR 332 900000 h at 131.0000000000 °F (55 °C), 80 % load conforming to SR 332	
Output protection type	Against overload and short-circuits automatic reset Against over temperature manual reset Against overvoltage manual reset	
Connections - terminals	Screw connection 0.52.5 mm², AWG 20AWG 14) input/output	
Line and load regulation	< 0.5 % network 0 to 100 % load at 77.0000000000 °F (25 °C) < 1 % network full voltage range in line at 77.00000000000 °F (25 °C)	
Status LED	1 LED (Green) output voltage	
Depth	3.5 in (89.5 mm)	
Height	3.0 in (75 mm)	
Width	1.2 in (30 mm)	
Net Weight	0.397 lb(US) (0.180 kg)	
Output coupling	Parallel Serial	
Mounting support	Top hat type TH35-15 rail IEC 60715 Top hat type TH35-7.5 rail IEC 60715 Double-profile DIN rail	
Supply	SELV IEC 60950-1 SELV IEC 60204-1 SELV IEC 60364-4-41	
Dielectric strength	3000 V AC with input to output	
Service life	10 year(s)	
Overvoltage category	II	

Environment

Standards	IEC 62368-1 EN/IEC 61204-3 IEC 61000-6-1 IEC 61000-6-2 IEC 61000-6-3 IEC 61000-3-2 EN 61000-3-2 EN 61000-3-3 UL 62368-1 CSA C22.2 No 62368-1 UL 508 CSA C22.2 No 107.1 EN/IEC 62368-1
Product certifications	CE CUL Listed CUL Recognized RCM CB Scheme EAC KC NEC class 2
Operating altitude	< 6561.68 ft (2000 m)
Shock resistance	150 m/s² 11 ms
IP degree of protection	IP20

Ambient air temperature for operation	$-4.00000000014.0000000000 ^\circ F (-2010 ^\circ C) \text{with current derating of 2 \% per} ^\circ C \text{mounting position A} ^< 6561.68 \text{ft } (2000 \text{m}) \\ 14.0000000000131.0000000000 ^\circ F (-1055 ^\circ C) \text{without derating mounting position A} ^< 6561.68 \text{ft } (2000 \text{m}) \\ 131.0000000000158.0000000000 ^\circ F (5570 ^\circ C) \text{with current derating of 3.33 \% per} ^\circ C \text{mounting position A} ^< 6561.68 \text{ft } (2000 \text{m}) \\ \end{array}$
Electrical shock protection class Class I	
Pollution degree	2
Vibration resistance	3 mm 29 Hz)IEC 60068-2-6 10 m/s² 9200 Hz)IEC 60068-2-6
Electromagnetic immunity	Immunity to electrostatic discharge - test level: 8 kV (contact discharge) conforming to IEC 61000-4-2 Immunity to electrostatic discharge - test level: 15 kV (air discharge) conforming to IEC 61000-4-2 Immunity to conducted RF disturbances - test level: 15 V/m (80 MHz2 GHz) conforming to IEC 61000-4-3 Immunity to conducted RF disturbances - test level: 5 V/m (22.7 GHz) conforming to IEC 61000-4-3 Immunity to conducted RF disturbances - test level: 5 V/m (2.76 GHz) conforming to IEC 61000-4-3 Immunity to fast transients - test level: 4 kV (on input-output) conforming to IEC 61000-4-4 Surge immunity test - test level: 4 kV (between power supply and earth) conforming to IEC 61000-4-5 Surge immunity test - test level: 3 kV (between phases) conforming to IEC 61000-4-5 Immunity to conducted RF disturbances - test level: 15 V (0.1580 MHz) conforming to IEC 61000-4-6 Immunity to magnetic fields - test level: 30 A/m (5060 Hz) conforming to IEC 61000-4-8 Immunity to voltage dips conforming to IEC 61000-4-11 Disturbing field emission conforming to EN 55016-2-3 Limits for harmonic current emissions conforming to IEC 61000-3-2 conforming to EN 55016-1-2 conforming to EN 55016-2-1
Electromagnetic emission	Conducted emissions IEC 61000-6-3 Radiated emissions IEC 61000-6-4

Ordering and shipping details

Category	US1CP1222525
Discount Schedule	CP12
GTIN	3606481500182
Returnability	Yes
Country of origin	РН

Packing Units

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.496 in (3.800 cm)
Package 1 Width	3.386 in (8.600 cm)
Package 1 Length	4.291 in (10.900 cm)
Package 1 Weight	7.619 oz (216.000 g)
Unit Type of Package 2	S02
Number of Units in Package 2	30
Package 2 Height	5.906 in (15.000 cm)
Package 2 Width	11.811 in (30.000 cm)
Package 2 Length	15.748 in (40.000 cm)

Package 2 Weight

15.382 lb(US) (6.977 kg)



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.		
Circularity Profile	End of Life Information		
California Proposition 65	"WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov"		

Product data sheet

ABLS1A24021


Dimensions Drawings

Electrical Safety

- If the unit is use in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
- For means of disconnection a switch or circuit breaker, located near the product, must be included in the installation. A marking as disconnecting device for the product is required.
- The device has an internal fuse. The unit is tested and approved with branch circuit protective device up to 20A. This circuit breaker can be used as disconnecting device.
- The power supply is only suitable for audio, video, information, communication, industrial and control equipment

Dimensions


Front and Side Views

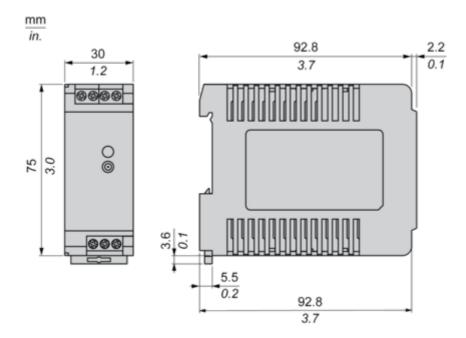

Connections and Schema


Connections and Schema

Correct Parallel Connection

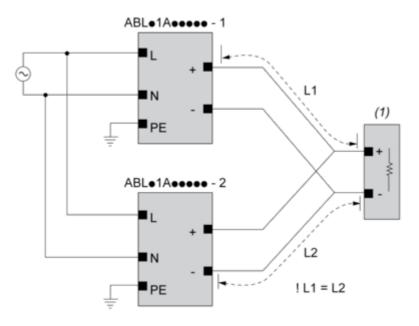

(1) : Load

Incorrect Parallel Connection

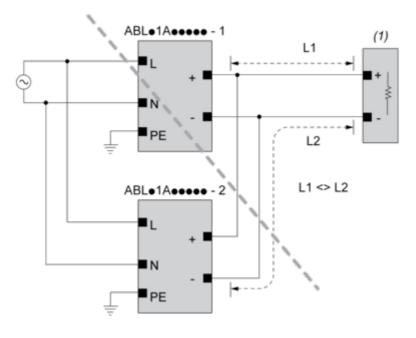


(1): Load ABLx1Axxxxx-1 = ABLx1Axxxxx-2 max 2 x ABLx1Axxxxx L1 = L2 $\Delta V max 25 mV$ $I_{Load} < 90\% 2 x I_{nom}$

Output Voltage Balancing


Product data sheet

ABLS1A24021

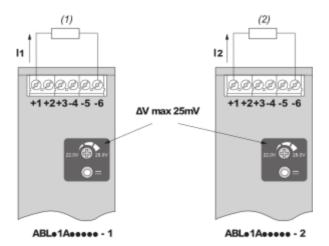

- (1): R_{Load1}
- (2): R_{Load2}
- $R_{Load1} = R_{Load2}$
- $I_1 = I_2 = \sim I_{\text{nom}}$

Series Connection

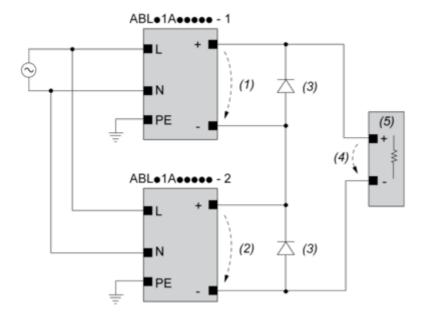

- (1): V_{out1}
- (2) : V_{out2}
- (3) : 2 x Diode, V_{RRM}> 2 x V_{out1/2}, I_F > 2 x I_{nom1/2}
- (4) : V_{Load} = 2 x V_{out}
- (5) : Load

Connections and Schema

	(1)		
	<40°C	<50°C	<70°C
ABLS1A24021	50°C	60°C	75°C
ABLS1A24038	50°C	60°C	75°C
ABLS1A12062	50°C	60°C	80°C
ABLS1A24031	50°C	60°C	80°C
ABLS1A12100	60°C	70°C	90°C
ABLS1A24050	60°C	70°C	90°C
ABLS1A48025	60°C	70°C	90°C
ABLS1A24100	60°C	70°C	90°C
ABLS1A24200	95°C	95°C	90°C


(1): Ambient

Mounting and Clearance


Mounting


Mounting Position A



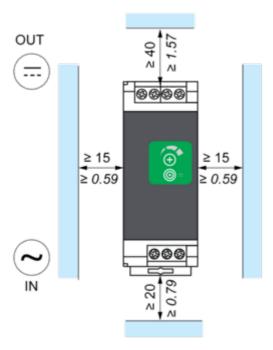

Mounting Position B

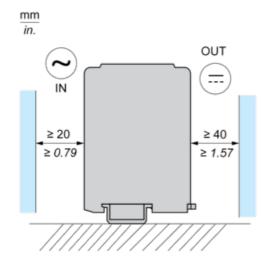





11


Mounting Position C


ABLS1A24021

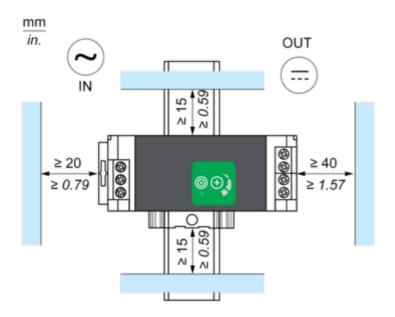

Incorrect Mounting








Performance Curves

Performance Curve

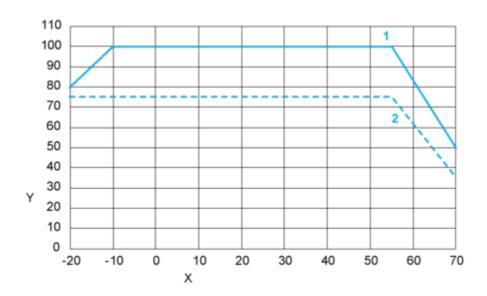

X: Surrounding Air Temperature (°C)
Y: Percentage of Maximum Load (%)

1 : Position A
2 : Position B + C

Note : Altitude ≤ 2000 m (6561 ft)

Image of product / Alternate images

Alternative







